


MAX® 40cs/MAX® 42/MAX® 43 | PAC® 120/PAC® 125T

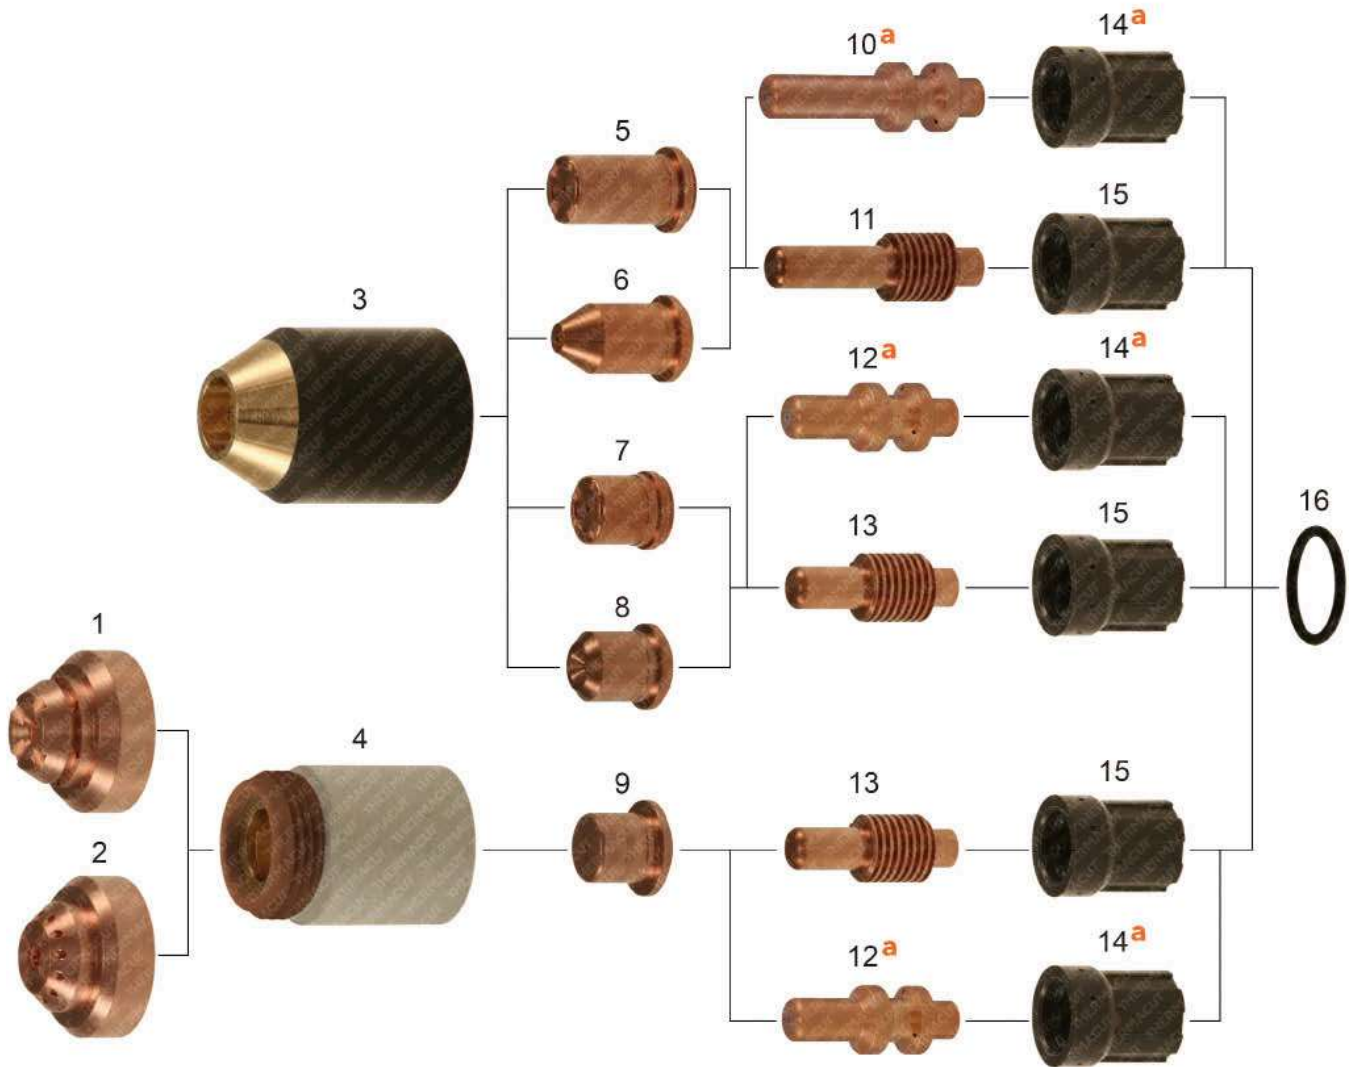

| Item | Part No. | Ref. No. | Description | Std. Pkg. |
|---------|----------|-----------|--------------------------------|-----------|
| *1. | T-9824* | 120601-UR | Shield, Hand | 1 |
| *2. | T-9825* | 120602-UR | Shield, Machine | 1 |
| 3. | T-9580 | 020930 | Retaining Cap | 1 |
| 4. | T-12045 | 120600 | Retaining Cap | 1 |
| 5. | T-0089 | 020546 | Nozzle, Extended | 10 |
| 6. | T-0093 | 120023 | Nozzle, Pipe Saddle | 5 |
| 7. | T-0027 | 020350 | Nozzle, 40A | 10 |
| | T-0028 | 020395 | Nozzle | 10 |
| (OD)8. | T-0094 | 020539 | Nozzle, Gouging | 10 |
| 9. | T-3420 | 120438 | Nozzle | 10 |
| (a)10. | T-4451 | 120574-UR | Electrode, Extended, Long Life | 5 |
| 11. | T-2298 | 120574 | Electrode, Extended | 5 |
| (a)12. | T-4450 | 120573-UR | Electrode, Long Life | 5 |
| 13. | T-3419 | 120573 | Electrode | 5 |
| (a) | T-4452 | 020361-UR | Swirl Ring | 2 |
| (OD)14. | T-0029 | 020361 | Swirl Ring | 2 |

| | | | | |
|---------|---------|-----------|---|----|
| (OD)16. | T-0038 | 044016 | O-Ring | 10 |
| NS | KT-1405 | 128925 | RT60M™ Cable Leads 15.2m (50') with CC | 1 |
| NS | KT-1406 | 083218-UR | RT60M™ Machine Torch with Leads 15.2m (50') with CC | 1 |

* – FULLY INTERCHANGEABLE AND COMPATIBLE WITH ORIGINAL PARTS, BUT DIFFERS FROM ORIGINAL DESIGN

(a) – MUST BE USED ONLY AS THE SET OF ELECTRODE & SWIRL RING LIKE SHOWN IN THE PICTURE (-UR DESIGN VERSION OR OEM VERSION), SET OFFERS LIFETIME LONGER UP TO 50%.

OD – ON DEMAND — WE DO NOT KEEP THESE PARTS IN STOCK, COST IS SET ACCORDING TO THE ORDERED QUANTITY, DELIVERY TIME MAY DIFFER FROM STANDARD PRODUCTS.

NS – NOT SHOWN IN THE PICTURE

SMART SOLUTION – DESIGN IMPROVEMENTS THAT BRINGS ADDED VALUE SUCH AS IMPROVED LIFETIME OF CONSUMABLES, EXCELLENT CUT QUALITY, SPEED OR BETTER COST EFFECTIVENESS OF YOUR SYSTEM

